

HT-SERIES BASIC RECORDING

On HT-SERIES, RECORD SETTING can be done in the following menu

MENU → CAMERA → SCHEDULE



RECORDING OPTIONS


- T (REC) = CONTINUOUS RECORDING
- E (Event REC) = EVENT RECORDING, such as SENSOR & MOTION.
- — (NO REC) = NO RECORDING
- S (Sensor) = ONLY SENSOR RECORDING
- M (Motion) = ONLY MOTION RECORDING

1) Select from **1 ~ 4** CAMERAS, **5 ~ 8** CAMERAS, **9 ~ 12** CAMERAS, or **13 ~ 16** CAMERAS.

2) You can press **(v)** to change RECORDING OPTIONS all at once.

3) **APPLY ALL** = Apply the settings onto MON ~ SUN.

SETTING FRAMES

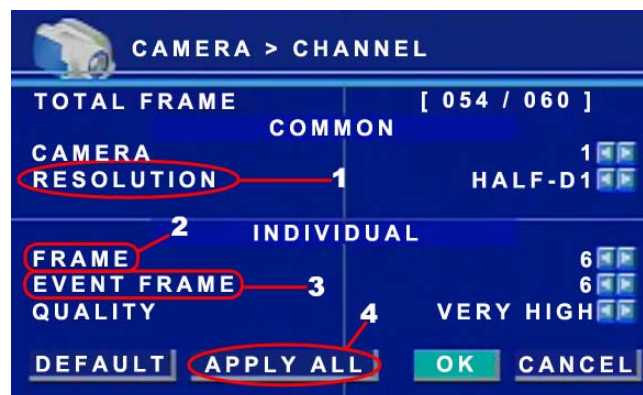

MENU → CAMERA → CHANNEL

1) RESOLUTION = CIF (360x240), HALF-D1 (720x240), D1 (720x480).

2) FRAME = Frame Rate for CONTINUOUS RECORDING

3) EVENT FRAME = Frame Rate for SENSOR & MOTION RECORDING.

4) APPLY ALL = Copy the settings to rest of the CAMERAS.