


# HT-SERIES DDNS SETUP

Once you have set up your NETWORK in TCP/IP from your DVR, and opened PORTS from the ROUTER, the next step is setting up DDNS.

First go to [www.dvrdns.net](http://www.dvrdns.net), and then do the following steps.

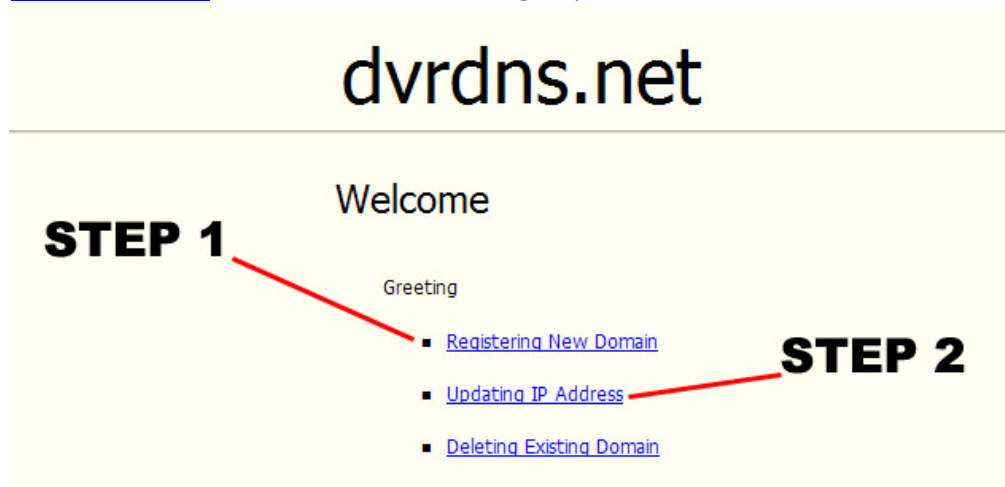

## STEP 1

Create any name, and then press "REGISTER"



## STEP 2


Enter the name that you created in STEP 1, and then press "UPDATE".



## SETTING UP DDNS IN DVR


Once you have registered for a DOMAIN NAME and have UPDATED, then do as follows.

MENU → NETWORK → DDNS

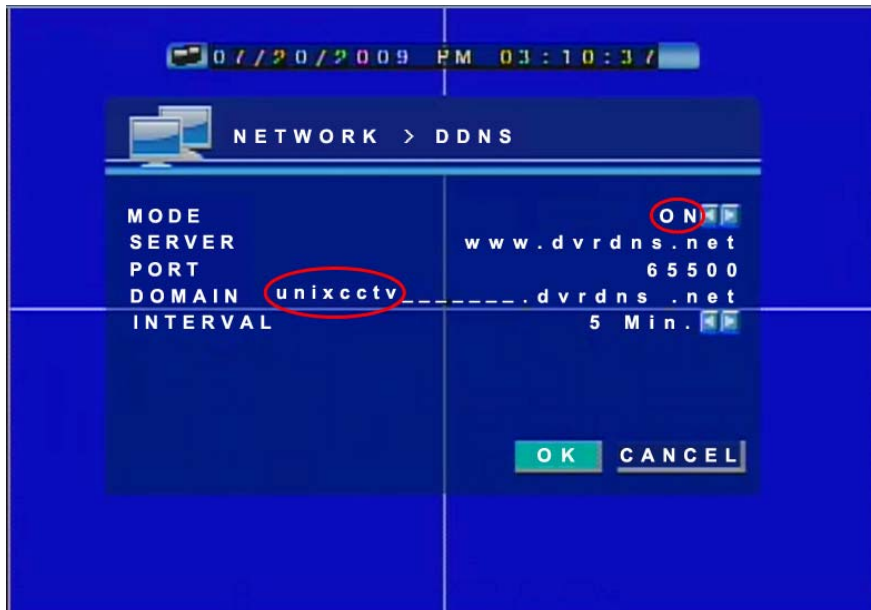

- If you are using DDNS, MODE should be ON
- DOMAIN = Enter the DOMAIN NAME that you have created (STEP 1) in [www.dvrDNS.net](http://www.dvrDNS.net)

## CONNECT TO YOUR DVR

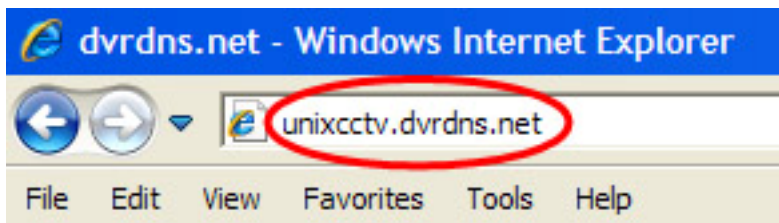

- Open the WEB BROWSER (Internet Explorer), then type “DOMAIN NAME.dvrDNS.net”

### NOTE

#### **PORTS THAT NEEDS TO BE OPEN**

9091 = PLAYBACK (can be changed)

9092 = LIVE (It will change + 1 as PLAYBACK changes)

80 = WEB (can be changed)

65500 = DDNS (can NOT be changed)

#### **AVAILABLE USERS**

ADMIN, USER1, USER2, USER3, ANONYMOUS (TOTAL 5)

By DEFAULT none of them has password.